



Powered by the exclusive iQ Blower System™ with GPS Technology (see page 62) for the quietest, most energy efficient and fastest smoke and odor removal available in a range hood; external blowers offered separately.

LED lighting has an extremely long lifespan; lamps may never need replacement.

Quick release, dishwasher-safe, mesh grease filters ensure a clean, fresh kitchen.

Heat Sentry™ detects excessive heat and adjusts blower to high automatically.

Works with optional Universal Make-Up Air Dampers.

#### Model Numbers:

WC34IQ90SB

WC34E90SB



Four-speed electronic control includes 10-minute delay-off and filter clean reminder.



LED lighting produces beautiful bright, clean light using minimal energy.



### Hood Sizes

**Width** 35-7/16" (90cm)

**Depth** 18-1/8"

### Finish

Stocked Brushed Stainless Steel

Special Order Not Available

### Features

Lighting Type LED 6-watts

Number of Lamps 2

Lighting Levels 1

Lighting Lamps Included Yes

Control Type 4-speed Electronic Pushbutton

Control Features Heat Sentry™ Delay Off, Filter Clean Reminder

Remote Control Not Available

Filter Type Mesh Grease Filter

Non-ducted Capability Yes

### Hood Blower Included (WC34IQ)

|                 |            |
|-----------------|------------|
| <b>Internal</b> | <b>iQ6</b> |
| Blower CFM      | 600        |
| Sones Low/High  | 0.3/7.5    |

### Hood Blower Options (WC34E blowers sold separately)


| External In-line   | ILB3 | ILB6 | ILB9 | ILB11 |
|--|------|------|------|-------|
| Max CFM  | 280  | 600  | 800  | 1100  |
| Sone levels are typically half of comparable CFM internal blowers. |      |      |      |       |
| External Exterior  | EB6  | EB9  | EB12 | EB15  |
| Max CFM  | 600  | 900  | 1200 | 1500  |
| Sone levels are typically half of comparable CFM internal blowers. |      |      |      |       |

### Accessories

|                                     |                      |
|-------------------------------------|----------------------|
| 10'-11' Flue Extension (Ducted)     | AEWC345IQSB          |
| 10'-11' Flue Extension (Non-ducted) | AEWC345IQSBN         |
| Non-Duct Kit                        | ANKWC345             |
| Non-Duct Filter                     | AFCWC345             |
| Universal MUA Damper                | MD6TU, MD8TU, MD10TU |

### Installation Requirements

|                              |   |
|------------------------------|---|
| Amps @ 120V: Internal Blower | 4.0   |
| Amps @ 120V: External Blower | 7.0 Max   |
| Electrical Connection        | Plug In   |
| Duct Size: Internal Blower   | 8"  |
| Duct Size: External Blower   | 8" at hood (Transition to 10" typical, see pages 64-65) |
| Duct Direction               | Vertical  |
| Backdraft Damper             | Included  |

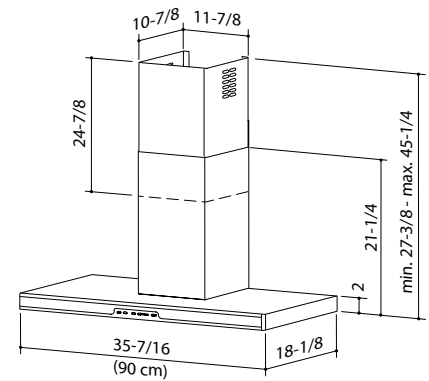

Installation height above the cooking surface: 24"-30"

Telescopic flue for 8'-9' ceiling is standard. Optional flue extensions for 10'-11' ceiling

Reversible telescopic flue allows non-ducted recirculation. (see page 68)

For more details see the product specifications sheet found at [www.BESTRangeHoods.com](http://www.BESTRangeHoods.com)