



## MEASURING YOUR HOME

### STEP 1

All doors must be at least 28-30" wide at their narrowest point. Be sure to account for knobs, latches, closers and screen doors.

### STEP 2


All hallways must be at least 28-30" wide at their narrowest point, including shelves or other wall-mounted items.

### STEP 3

Carefully measure the width, height and depth of the opening where the washer and dryer will be installed. Be sure to include door, floor and wall mouldings in your measurements.

For **height**, measure to the bottom of the overhead cabinets, if you have them.

For **depth**, allow 4-6" behind the machines for venting and connections.

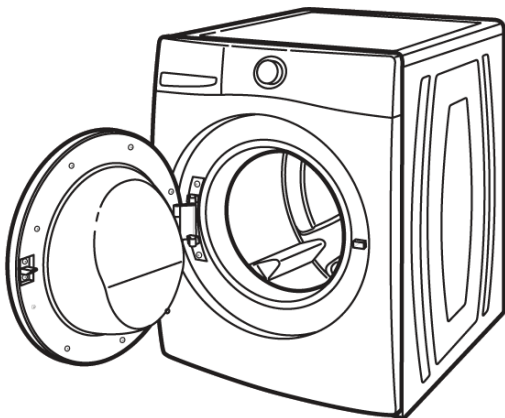

## MEASURING YOUR WASHER AND DRYER

Refer to the manufacturer specifications to ensure your washer and dryer will fit your space. If the laundry room isn't deep enough for the appliances plus the dryer duct, you may be able to use special venting components, such as a side vent kit, to reduce venting requirements. Ask your Trail Appliances Sales Representative for details.

Also, confirm where venting is required: right, left or rear. Side venting is available (on select models) at an additional cost and requires installation by a Trail-certified appliance technician at the warehouse before delivery.

Where is your current dryer vent:

right

left

rear

**Remember, if ANY part of the washer and/or dryer is too large to fit your space and the obstructions can't be moved, you'll need to notify your Trail Appliances sales representative BEFORE your scheduled delivery date!**

## PLEASE CONFIRM THE FOLLOWING

### WASHER

- 110V grounded 3-prong electrical outlet
- Water supply (hot and cold)
- Drain hose is in close proximity to the washer
- A clean, solid and level floor surface

### DRYER

- Voltage of electrical outlet

## ADDITIONAL REMINDERS

Stacking (if applicable) is available at an additional cost. Accessory kit may be required.

Some units do not have fill hoses supplied. Steel braided hoses may be purchased from Trail Appliances at an additional cost. If you choose to use old hoses, Trail Appliances will not be able to connect your washer upon delivery for insurance liability reasons.

Extra length drain hoses are not recommended and may void the manufacturer's warranty.

Undercounter installation is the sole responsibility of the home owner and will not be installed by the Trail Appliances delivery team.

Due to high spin speeds on front-load washers, a solid, secure floor is recommended to reduce vibration and noise.

Hanging dryers must be removed prior to delivery.

If installation does not meet code, Trail Appliances will not be able to install until the necessary requirements are met.

Additional delivery costs may apply if Trail Appliances needs to make a repeat delivery.

**If you have any questions in regards to your new washer and dryer, please contact your Trail Appliances Sales Representative for further clarification. Thank you!**