


SPECIFICATIONS

MODEL	IU600ES SERIES
VOLTS	120 VAC
HZ	60
AMPS	1.8
INTERNAL BLOWER	600 CFM
CFM (LOW SPEED HORIZ. DISCHARGE)	160
CFM (HIGH SPEED HORIZ. DISCHARGE)	500*
CFM (LOW SPEED VERT. DISCHARGE)	160
CFM (HIGH SPEED VERT. DISCHARGE)	440*
SONE (LOW SPEED HORIZ. & VERT. DISCH.)	1.0
SONES (HIGH SPEED HORIZ. DISCHARGE)	9.5
SONES (HIGH SPEED VERT. DISCHARGE)	9.5
DUCTING SIZE	3 1/4" x 10"
2 LED MODULES	120 V, 5.5 W
WARRANTY	5 YEARS (EXCEPT LED MODULES, 3 YEARS)

* IF NEEDED, ASK A RECOMMENDED INSTALLER TO LIMIT DISCHARGE TO 300 CFM.

DIMENSIONS

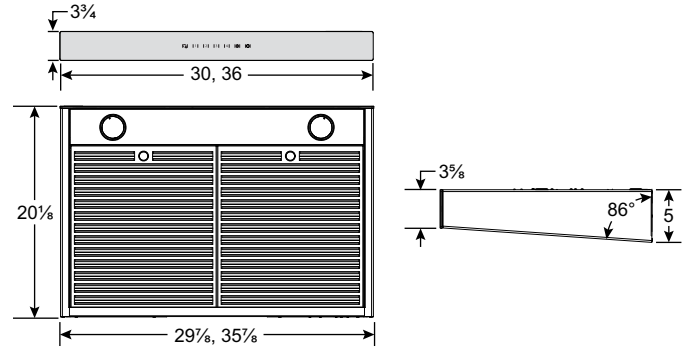


HK0147


NOTE: DIMENSIONS SHOWN ARE IN INCHES.



AIR FLOW PERFORMANCE

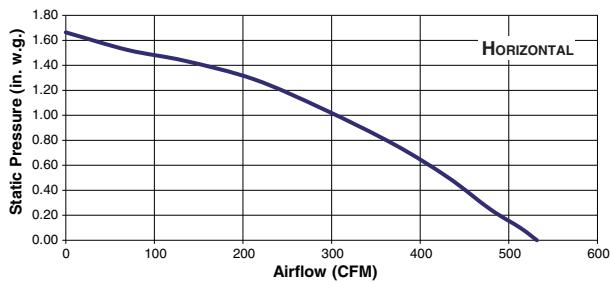

HG0077A

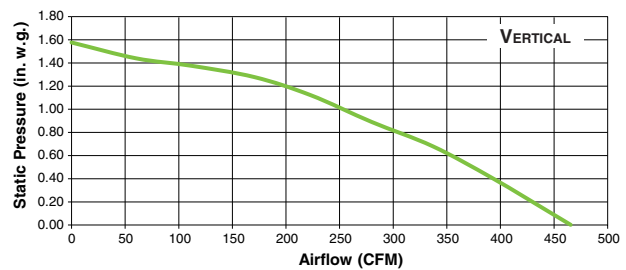

HVI-2100 CERTIFIED RATINGS comply with new testing technologies and procedures prescribed by the Home Ventilating Institute, for off-the-shelf products, as they are available to consumers. Product performance is rated at 0.1 in. (2.54 mm) static pressure, based on tests conducted in a state-of-the-art test laboratory. Sones are a measure of humanly-perceived loudness, based on laboratory measurements.



www.venmar.ca

Venmar Ventilation inc., 550 Lemire Blvd., Drummondville, Québec, Canada J2C 7W9 - Tel: 1-800-567-3855 Fax: 1-800-567-1715

PROJECT	REMARKS
LOCATION	
MODEL No.	
QTY.	
SUBMITTED BY	
DATE	