

48" DUAL FUEL RANGE - 4 BURNERS, INFRARED CHARBROILER AND INFRARED GRIDDLE



DF484CG



FEATURES

4 dual-stacked burners plus 16,000 Btu charbroiler and 15,000 Btu griddle

Dual-stacked burners produce up to 20,000 Btu

Burners capable of delivering less than 300 Btu for premier simmer performance

Dual convection oven for faster, more consistent cooking

10 cooking modes make meals easy

Second 18" single convection oven

Rigorously tested in our U.S. manufacturing facilities for decades of use

Exceptional 24/7 support from our Customer Care team in Madison

Continuous cast-iron grates for easy movement of pots and pans

Cobalt blue porcelain interior

Individual spark ignition system

Heavy-gauge stainless steel

Exclusive pivoting control panel

Red, black or stainless steel control knobs

Temperature probe lets you know when it's done

Self clean, delayed start, timed cook, Sabbath mode and more

ACCESSORIES

Bake stone kit (stone, rack and peel)

Stainless steel, brass or chrome bezels

Front leg and rear caster covers

High altitude conversion kit

Dehydration kit (racks and door stop)

Full-extension easy glide oven rack

Cast iron S-grates and wok grate

Stainless steel kickplate

Signature red, black or stainless steel control knobs

Temperature probe and broiler pan

5" and 10" stainless steel risers, and 20" riser with shelf

Set of three standard oven racks

30" baking sheet

Hardwood cutting board


Accessories available through an authorized Sub-Zero dealer.
For local dealer information, visit subzero-wolf.com/locator.



KNOB OPTIONS



TOP CONFIGURATION

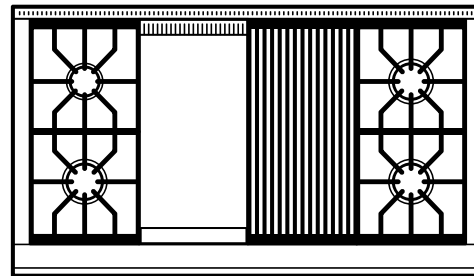

RANGETOP SPECIFICATIONS

- 1 - 9,200 Btu Burner
- 1 - 15,000 Btu Burner
- 1 - 18,000 Btu Burner
- 1 - 20,000 Btu Burner
- 1 - 16,000 Btu Charbroiler
- 1 - 15,000 Btu (14,000 Btu LP) Griddle


48" DUAL FUEL RANGE - 4 BURNERS, INFRARED CHARBROILER AND INFRARED GRIDDLE




PRODUCT SPECIFICATIONS

| | |
|----------------------------|--------------------------------|
| Model | DF484CG |
| Dimensions | 47 7/8"W x 36 7/8"H x 29 1/2"D |
| Oven 1 Interior Dimensions | 14"W x 16 1/2"H x 19"D |
| Oven 2 Interior Dimensions | 25"W x 16 1/2"H x 19"D |
| Oven 1 Usable Capacity | 1.5 cu ft |
| Oven 1 Overall Capacity | 2.5 cu ft |
| Oven 2 Usable Capacity | 2.8 cu ft |
| Oven 2 Overall Capacity | 4.5 cu ft |
| Door Clearance | 19 1/2" |
| Weight | 750 lb |
| Electrical Supply | 240/208 VAC, 60 Hz |
| Electrical Service | 50 amp dedicated circuit |
| Gas Supply | 3/4" rigid pipe |
| Gas Inlet | 1/2" NPT female |


ELECTRICAL AND GAS



DIMENSIONS

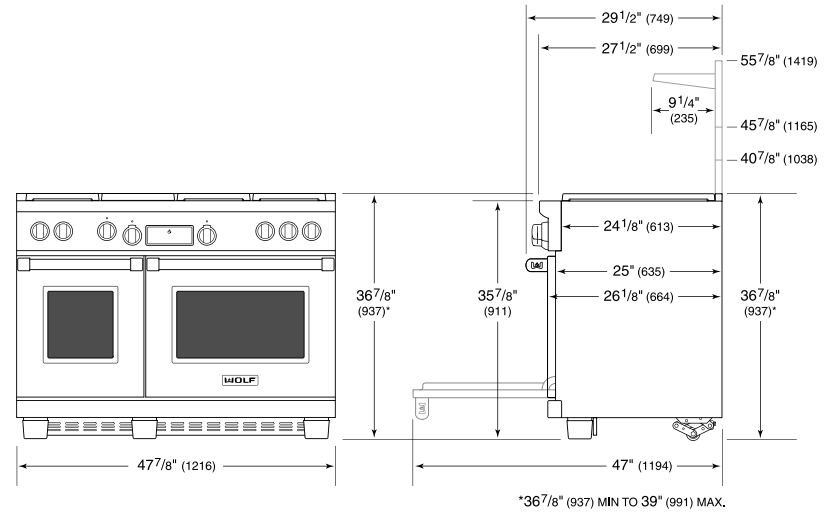

STANDARD INSTALLATION

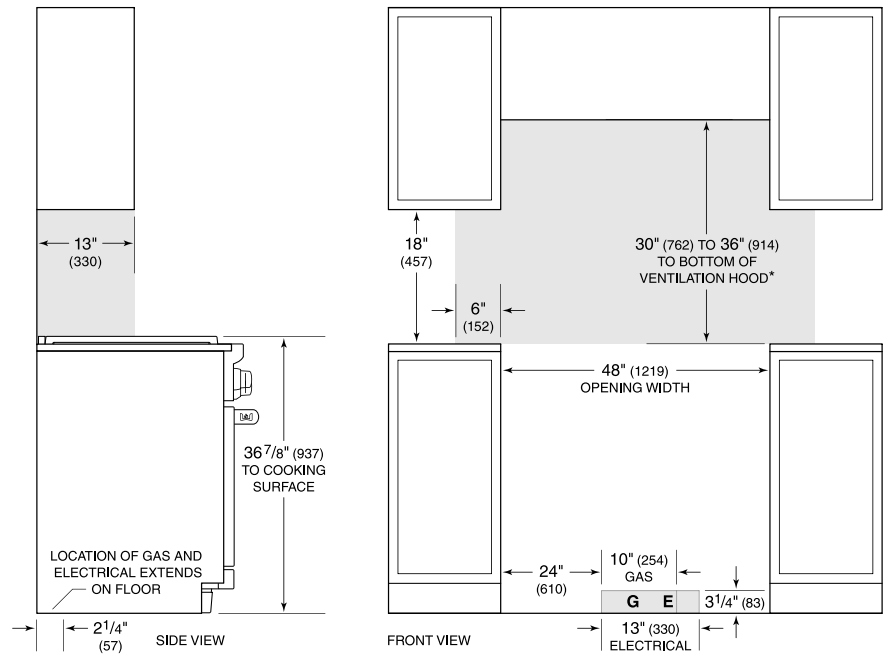

*Without ventilation hood, 36" (914) minimum clearance countertop to combustible materials, 44" (1118) for charbroiler.

NOTE: Shaded area above countertop indicates minimum clearance to combustible surfaces, combustible materials cannot be located within this area.

For island installation, 12" (305) minimum clearance back of range to combustible rear wall above countertop.