# 24" TRANSITIONAL FRAMED INDUCTION COOKTOP

CI243TF/S

## FEATURES

- Incredible cooking control, with lightning fast high heat and very low lows
- Three elements and bridging option to accommodate different pan sizes
- Efficiently transfers heat, because energy is supplied directly to the cookware
- Cookware sensing guards against hot burners being left on
- Cooktop stays relatively cool for added safety and easy cleanup
- Rigorously tested in our U.S. manufacturing facilities for decades of use
- Exceptional 24/7 support from our Customer Care team in Madison

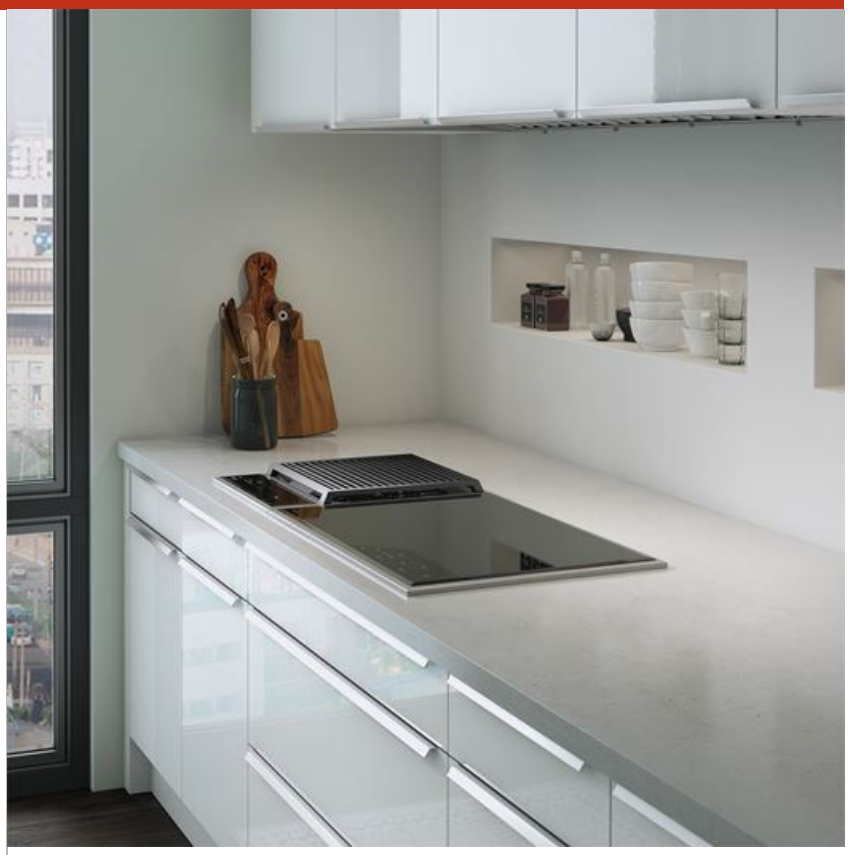

## COOKTOP SPECIFICATIONS

- 1 - 2100 W Element
- 1 - 2100 W Element with 3000 W Boost
- 1 - 2600 W Element with 3150 W Boost

Specifications are subject to change without notice. This information was generated on March 7, 2019. Verify specifications prior to finalizing your cabinetry/enclosures.

# 24" TRANSITIONAL FRAMED INDUCTION COOKTOP

## PRODUCT SPECIFICATIONS

| | |
|---|---|
| Model | CI243TF/S |
| Dimensions | 23 5/8"W x 2"H x 21"D |
| Electrical Supply | 3-wire, 240/208 VAC, 60 Hz |
| Electrical Service | 30 amp dedicated circuit |
| Conduit Length | 4 Feet |

## ELECTRICAL




**NOTE:** Dimensions in parenthesis are in millimeters unless otherwise specified

## DIMENSIONS

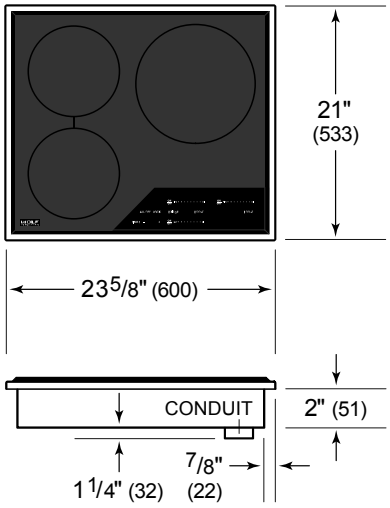


## STANDARD INSTALLATION

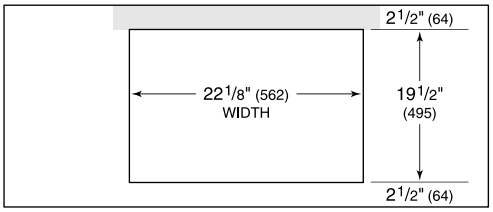


COUNTERTOP CUT-OUT

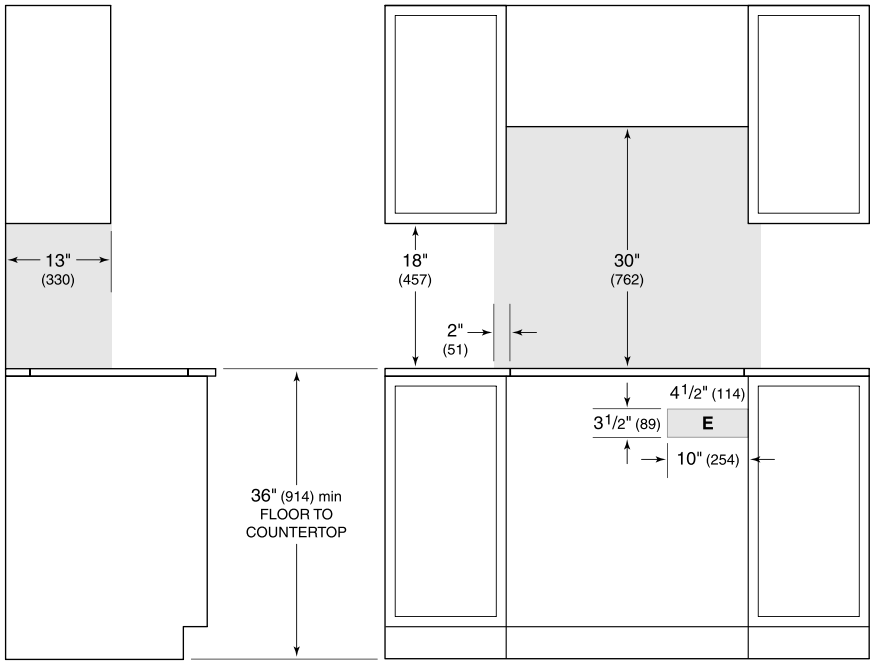


SIDE VIEW FRONT VIEW

*NOTE: Shaded area above countertop indicates minimum clearance to combustible surfaces, combustible materials cannot be located within this area.*
*Electrical supply location only applies to installations with built-in oven.*

Specifications are subject to change without notice. This information was generated on March 7, 2019. Verify specifications prior to finalizing your cabinetry/enclosures.